


# WELDEX CORPORATION

## WDAC-5700DN - COLOR DIGITAL LOW LIGHT CAMERA WITH DIGITAL SLOW SHUTTER

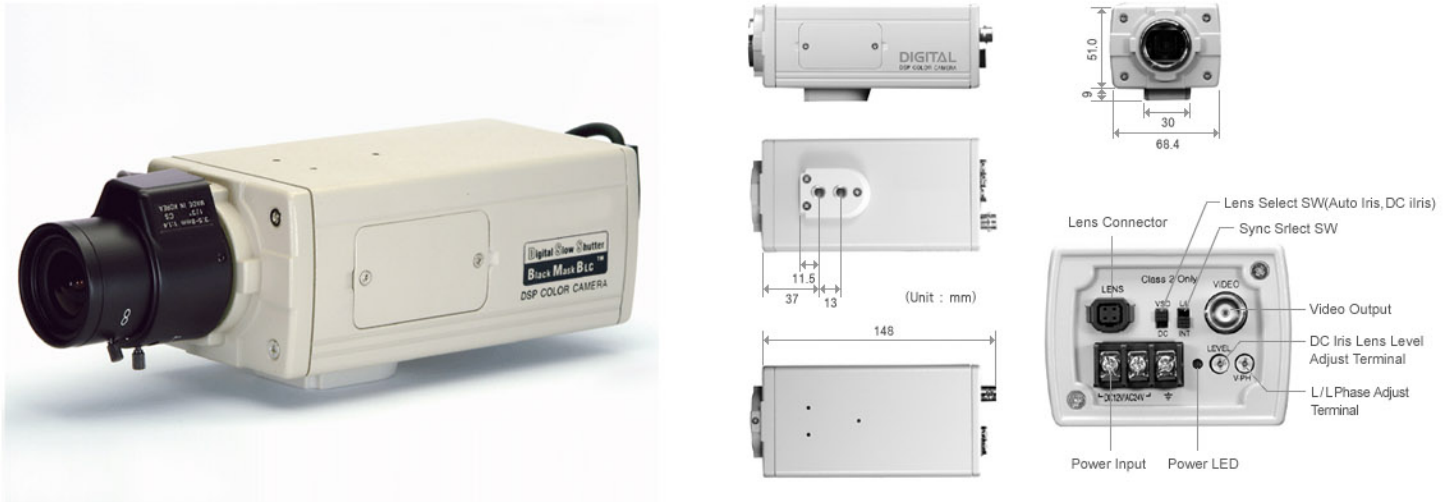

<b>Model</b>	<b>WDAC-5700DN</b>
Pick-up Device	1/3" Sony IT Color CCD, 410K Pixels
Effective Pixels	768 (H) x 494 (V)
Television System	NTSC , 525 lines, 2 :1 Interlace
Sync. System	Internal / External AC line lock, $\pm 90^\circ$ V-phase adjustment
Horizontal Resolution	480 TV Lines
Min. Illumination	0.2 lx (F1.2, 30 IRE) 0.001 lx (F1.2, x128 DSS)
Shutter Speed	1/60 - 1/100,000 (10 Steps)
Electronic Exposure	On / Off
S/N Ratio	more than 50dB (AGC off)
AGC	On / Off switch
White Balance	ATW / AWC / Indoor / Outdoor / Fluorescent Lamp / MWB, One Push WB
BLC	On / Off switch
BMB (Black Mask BLC)	On / Off (3 Level)
Video Output	Composite(1.0Vp-p), 75 ohms
Lens Control	Auto iris (VSD) / DC iris
<b>Electrical</b>	
Power Source	AC24V
Power Consumption	Max. 6W
Connector	Video Output : BNC Lens Connector : 4-pin connector
<b>Environmental</b>	
Operating Temperature	-10 Deg. C ~ 50 Deg. C
Storage Temperature	-20 Deg. C ~ 70 Deg. C
Operating Humidity	90% RH (non-condensing)
<b>Mechanical</b>	
Lens Mount	C/CS Mount (Included C-ring)
Camera Mount	Locking holder
Material	Aluminum
Color	Beige
Weight	440g
Dimensions (WxHxD)	68.4 x 51.0 x 148 mm
Certification	CE, FCC